



# A Unique & Economical Coding Experience

An ISO 9001:2015 Certified Company

## I 333 Small Character Printer



- ➔ Easy to Operate
- ➔ Seamless Print
- ➔ Long lasting spares
- ➔ Long Mileage
- ➔ Offeredable cost
- ➔ Fast, Fair, Fabulous Print Quality



## I 333 Small Character Printer

### Standard Functions

1. Continuous inkjet printing with Mono print head control & Automatic nozzle cleaning.
2. Single button start & stop; Print Stop function; Password to protect the menus.
3. Friendly operation interface; QWERTY key pad with LCD display.
4. Traverse system printing option available in default.
5. Logo and graphics printing Option; Julian date printing option available.
6. Serial number, shift code, Real time & date printing function available.
7. Time could be offset to hours, 4 clocks could be inserted simultaneously in a message.
8. User-defined fonts, capable of printing anything you want
9. Two serial numbers could be inserted simultaneously
10. Large memory volume of over 1000 messages, WYSIWYG message editing, Locate any point edit.
11. Download message or update program by USB disk
12. Print counter & Meter counting option available
13. Display the faults and warnings in the screen
14. 1.5L Capacity of ink & makeup.
15. 3M conduit
16. Pigment, Soft Pigment and Regular model printers available.

### Print Capability

1. Print Line: 1-4 lines in 7font, 1-5 lines in 5font With 36 Pixel.
2. Message Height: 1-20mm, characters could be bolded 9times.
3. 5,7,9,12,16,24,32 type of fonts available, We can print English & Arabic languages.
4. Non contact printing 6mm – 20mm throw distance.

### Power Requirement

1. In put power range 210-230vac(3 amp), Frequency:50 – 60 hz, Power Consumption:60 watts

### Consumables

1. Unique hydraulic system design with diaphragm operating pump.
2. Wide range of inks for various applications – MEK, Ethanol & Acetone
3. Black, White, Yellow, Green, Blue, Red, Purple, Orange inks are available.

### Working Conditions

1. Working temperature: 5-45 centigrade Working humidity: 10-90 % ( non-condensing)

### External Connections

1. Photocell & encoder
2. RS232
3. USB
4. 24v Alarm
5. Positive Air pump

### General Accessories


1. Photocell Proximity Sensor
2. Print head stand
3. Printer stand
4. Tool kit

### Optional Accessories

1. Encoder
2. Alarm Beckon
3. UPS
4. Product counter
5. Positive Air kit

### Enclosure

SS enclose with IP55

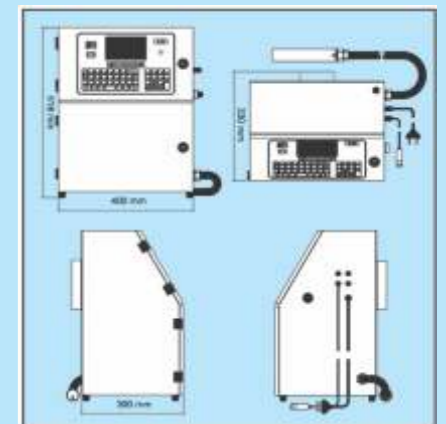

An ISO 9001:2015 Certified Company

## INNOVATIVE CODES (I) PRIVATE LIMITED

Old No 12 New No 21 Nungambakkam High Road  
Chennai 600034 India  
Tel 044 4320 4842  
E Mail corporate@icpl.co Website www.icpl.co